

Data sheet


UTP 24 port 1RU LSA Cat.5e patch panel

Page 1/4


P/N
130A08-AP29-E
EAN 4250184169833

2017-15-08

Illustrations

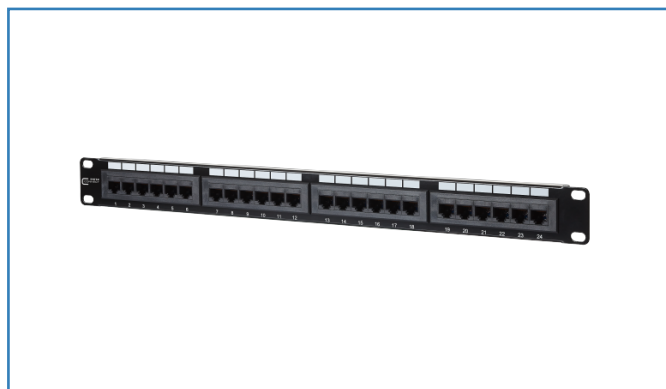

Dimensional drawing

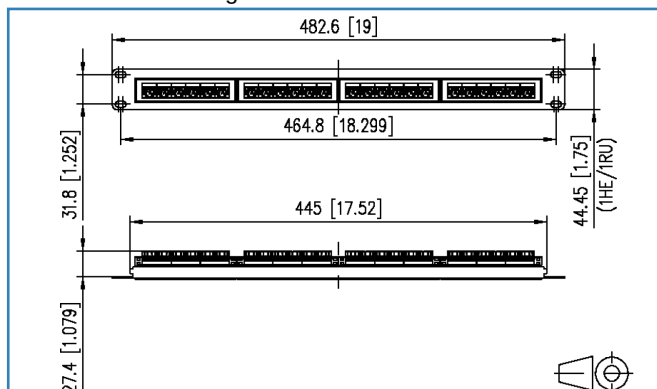

See enlarged drawings at the end of document

Product specification

- 19 inch 1RU Cat.5e patch panel with 24 RJ45 ports 8(8)
- 19 inch module frame made of black sheet steel
- 4 individual 6 port connection blocks, unshielded
- connection of the unshielded data cables to LSA insulation displacement connectors (AWG 22 to 26)
- wire connection possible according to T568A and T568B
- with 4 clip-in plastic cable brackets
- punch down patch panel



UTP 24 port 1RU LSA Cat.5e patch panel

P/N

130A08-AP29-E

EAN 4250184169833

2017-15-08

Technical Data

General Data

Fields of application

Office

Design

patch panel

Mounting style

1RU

Shielding

unshielded

Transmission technology

Copper

Wiring

T568A, T568B

Color

black

Dimensions

Dimension (L x W x H)

27.40 x 482.60 x 44.45 mm

Dimension (L x W x H)

1.079 x 19.00 x 1.75 in.

Inches

19 inches

Height unit

1RU

Labeling option

firmly printed label areas

Transmission characteristics

Category (ISO)

5e

Category (TIA)

5e

Connections/interfaces

Connector technology interface 1

LSA terminal block

Connector technology interface 2

RJ45-jack

Number of ports interface 2

24

Number of ports interface 2 equipped

24

Number of positions/contacts interface 1

24 x 8

Number of positions/contacts interface 2

24 x 8P/8C

Mechanical characteristics

Life - Number of mating cycles

min. 750

Position/mounting of latch - standard installation position

bottom



Technical Data

Materials and material properties

Material - Terminal block housing	PBT (polybutylene terephthalate)
Material - Jack contact	CuSn (tin bronze)
Material - Jack contact finish	Ni + Au (nickel-gold)
Material - Terminal block contact	CuZn (brass)
Material - Terminal block contact finish	Sn (tin)
Material - Module support	sheet steel

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-40 - 70 °C
Temperature - Storage °F	-40 - 158 °F
Temperature - Operating °C	-40 - 70 °C
Temperature - Operating °F	-40 - 158 °F

Approvals

RoHS	compliant
------	-----------

Classifications

ETIM 5.0	EC001128
ETIM 6.0	EC001128

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	1020.00 g
Packaging unit - Weight (pound)	2.25 lb
Packaging dimension (W x H x D)	520.00 x 100.00 x 46.00 mm
Packaging dimension (W x H x D)	20.472 x 3.937 x 1.811 in.



Illustrations

Dimensional drawing

