

Data sheet

E-DAT Industry patch cord V6 IP67 - RJ45 1.0 m

Page 1/6

P/N

141N113K10010


EAN 4250184131311

2017-28-11

Illustrations



Dimensional drawing

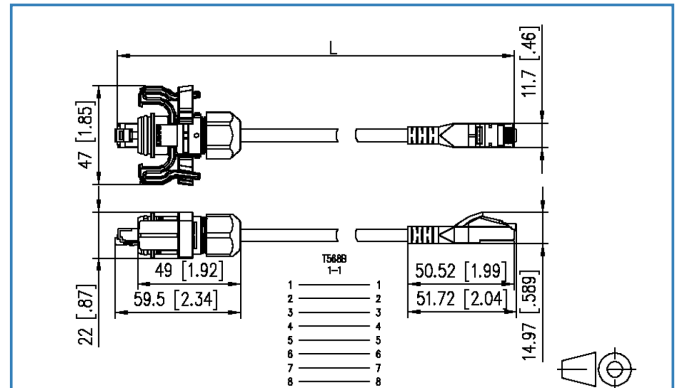

See enlarged drawings at the end of document

Product specification

- fully shielded Cat.6 patch cable AWG 26/7 S/FTP with PUR cable sheath
- 1 x RJ45 and 1 x RJ45-IP67-V6 connector, shielded
- 1:1 assignment
- compliance with class E to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- yellow cable, gray connector
- cable colors may differ
- other lengths available
- variants: 1, 2, 3, 5, 10, 15 and 20 m



E-DAT Industry patch cord V6 IP67 - RJ45 1.0 m

P/N

141N113K10010

EAN 4250184131311

2017-28-11

Technical Data

General Data

Fields of application

Industrial Ethernet

Design

Patch cords

Shielding

shielded

Transmission technology

Copper

Cable Type

S/FTP

Number of twisting elements

4

Twisting element

Pair

Wiring

1 - 1

Color

yellow

Dimensions

Dimension - Interface 1 (L x W x H)

51.72 x 11.70 x 14.97 mm

Dimension - Interface 1 (L x W x H)

2.036 x 0.461 x 0.589 in.

Dimension - Interface 2 (L x W x H)

59.50 x 47.00 x 22.00 mm

Dimension - Interface 2 (L x W x H)

2.343 x 1.85 x 0.866 in.

Cable length (m)

1.00 m

Cable length (ft)

3.28 ft

Transmission characteristics

Category (ISO)

6

Class (ISO/IEC)

E

PoE

IEEE 802.3af

PoE plus

IEEE 802.3at

UPoE

yes

Transmission rate up to 1 GBit (Fast Ethernet)

IEEE 802.3ab

Connections/interfaces

Connector technology interface 1

RJ45 plug

Connector technology interface 2

RJ45 plug

Number of ports interface 1

1

Number of ports interface 2

1

Number of equipped ports interface 1

1

Number of ports interface 2 equipped

1

Number of positions/contacts interface 1

8P/8C

Number of positions/contacts interface 2

8P/8C



E-DAT Industry patch cord V6 IP67 - RJ45 1.0 m

P/N

141N113K10010

EAN 4250184131311

2017-28-11

Technical Data

Connections/interfaces

Protective housing interface 2 V6

Termination data, stranded wire (min. - max.)

Conductor cross section, stranded wire AWG 26/7

Conductor cross section, stranded wire 0.141 mm²

Conductor diameter, stranded wire (bare copper) 0.483 mm

Conductor diameter, stranded wire (bare copper) 0.019 in.

Cable sheath diameter (min. - max.)

Cable sheath diameter 5.8 mm

Cable sheath diameter 0.228 in.

Electrical characteristics

Contact resistance max. 20 mOhm

Insulation resistance min. 500 MOhm

Mechanical characteristics

Life - Number of mating cycles min. 750

Position/mounting of latch - standard installation position top

Bending radius without load 17.4 mm

Bending radius without load 0.685 in.

Bending radius with load 46.4 mm

Bending radius with load 1.827 in.

Materials and material properties

Material - Conductor Cu (copper)

Material - Conductor Insulation Foam-Skin Polyethylen

Material - Cable jacket PUR

Material - Plug housing interface 1 PC UL94 V0

Material - Plug housing interface 2 PC UL94 V0

Material - Protective housing interface 1 PA 6.6 UL94 V0

Material - Contact interface 1 Ph-Br (Phosphor Bronze)

Material - Contact interface 2 Ph-Br (Phosphor Bronze)

Material - Contact finish interface 1 Ni + Au (nickel-gold)

Material - Contact finish interface 2 Ni + Au (nickel-gold)

Material - Protective housing interface 1 PA 6.6 UL94 V0



E-DAT Industry patch cord V6 IP67 - RJ45 1.0 m

P/N

141N113K10010

EAN 4250184131311

2017-28-11

Technical Data

Materials and material properties

Flame retardancy	yes
Halogen free	yes
Oil resistance	yes

Environmental conditions

Temperature (min. - max.)	
Temperature - Operating °C	-20 - 60 °C
Temperature - Operating °F	-4 - 140 °F
Temperature - Installation °C	0 - 50 °C
Temperature - Installation °F	32 - 122 °F
Particulate ingress interface 2	IP6X when plugged in
Liquid ingress/immersion interface 2	IPX7 when plugged in

Approvals

RoHS	compliant
------	-----------

The product meets the following standards

Generic cabling systems	
General requirements	ISO/IEC 11801 Ed.2.2:2011-06 DIN EN 50173-1:2011-09
Test for vertical flame propagation for a single insulated wire or cable	IEC 60332-1
Measurement of smoke density of cables burning	IEC 61034
Determination of acidity (by measuring the pH value) and conductivity	IEC 60754-2

Classifications

ETIM 5.0	EC001262
ETIM 6.0	EC001262

Packing details

Type of packaging	1 pc(s) / plastic bag
Packaging unit - Weight (gram)	68.00 g
Packaging unit - Weight (pound)	0.15 lb



Data sheet

Page 5/6

E-DAT Industry patch cord V6 IP67 - RJ45 1.0 m

P/N

141N113K10010

EAN 4250184131311

2017-28-11

Accessories

P/N	Designation
130906-V3-I	Locking clamp for IP67 V6 plug, light gray
130906-V5-I	Locking clamp for IP67 V6 plug, yellow
130906-V6-I	Locking clamp for IP67 V6 plug, blue
130906-V7-I	Locking clamp for IP67 V6 plug, green
130906-V8-I	Locking clamp for IP67 V6 plug, red



Illustrations

Dimensional drawing

