

## Data sheet

Page 1/4

## BMT-AOP4

Part number  
1108871302


## BACnet module with analog outputs

2016-11-14

### Illustrations




### Principle diagram

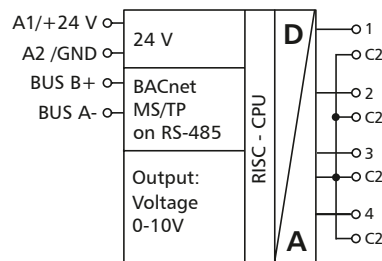

Use copper conductors only

### Wiring



### Product description

The BACnet MS/TP module with 4 analog outputs was developed for decentralized switching tasks.

It is suitable as encoder for control variables, for example for electrical vent and mixing valves, valve positions, etc.

The outputs can be output by means of standard objects via a BACnet client. Each output can be set for automatic or manual operation by means of 4 potentiometers at the front.

The module is addressed and the bitrate is set by means of two address switches on the front.

Suitable for decentralized mounting on DIN TH35 rail according to IEC 60715 in electrical distribution cabinets.

**Data sheet**  
**BMT-AOP4**  
**BACnet module with analog outputs**

Page 2/4  
**Part number**  
**1108871302**  
2016-11-14

**Technical data**

**Approvals**

C-UL Certification	Open Energy Management Equipment 34TZ
--------------------	---------------------------------------

**BACnet interface**

Protocol	BACnet MS/TP
Address range	00 to F9
Transmission rate	9600 to 115200 Bit/s, factory setting 9600 Bit/s
Cabling	RS485 two wire bus with potential equalization in bus or line topology terminate with 120 Ohm

**Supply**

Operating voltage	24 V AC/DC $\pm$ 10 % (SELV)
Current consumption	50 mA (AC) / 20 mA (DC)
Relative duty cycle	100 %

**Outputs**

Analog outputs	4
Voltage output	4x 0 to 10 V DC
Output current	5 mA to 10 V DC
Resolution	10 mV / digit

**Housing**

Dimensions WxHxD	1.378 x 2.728 x 2.362 in. (35 x 69.3 x 60 mm)
Depth including potentiometers	2.520 in. (64 mm)
Weight	72 g
Mounting position	any
Mounting	on TH35 rail per IEC 60715
Side-by-side mounting	Without space The maximum quantity of BACnet modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary.
Material	
Housing	polyamide 6.6 V0
Terminal blocks	polyamide 6.6 V0
Cover	polycarbonate
Type of protection (IEC 60529)	
Housing	IP40
Terminal blocks	IP20

## Data sheet

### BMT-AOP4

### BACnet module with analog outputs

Page 3/4

Part number  
1108871302

2016-11-14

#### Technical data

<b>Terminal blocks</b>	
Supply and bus	
Terminal block	4-pole
Solid wire	max. AWG 16 (1.5 mm <sup>2</sup> )
Stranded wire	max. AWG 18 (1.0 mm <sup>2</sup> )
Wire diameter	0.3 mm to max. 1.4 mm
Module connection, analog outputs	
Solid wire	max. AWG 12 (4 mm <sup>2</sup> )
Stranded wire	max. AWG 14 (2.5 mm <sup>2</sup> )
Wire diameter	0.3 mm to max. 2.7 mm
Protective circuitry	Polarity reversal protection of operating voltage Polarity reversal protection of supply and bus
<b>Temperature range</b>	
Operation	23 °F to 131 °F (-5 °C to +55 °C)
Storage	-4 °F to +158 °F (-20 °C to +70 °C)
<b>Display</b>	
Operating and bus activity	green LED
Error indication	red LED
<b>Additional documents</b>	
Software description, mounting note, certificates	All additional documents are available for download at <a href="http://www.metz-connect.com">www.metz-connect.com</a>



Data sheet

BMT-AOP4

BACnet module with analog outputs

Page 4/4

Part number

1108871302

2016-11-14

Dimensional drawing

