

Data sheet

LF-DI230

Part number
11086313


LON module with digital inputs

2015-03-20


Illustrations



Principle diagram

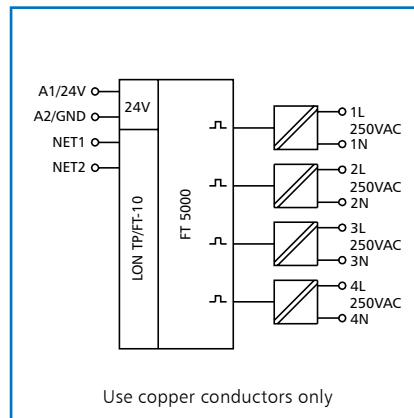

Wiring

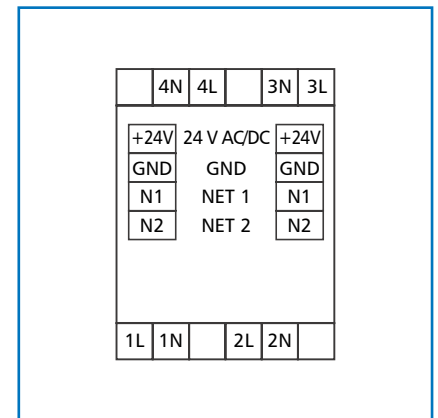

Product description

The LON module with 4 digital inputs was developed for decentralized switching tasks. It is suitable for detecting 230 V AC switch states, for example, switches or buttons for light control. The input terminals 1L to 4L are wired with 1N to 4N terminals to 230 V AC via switches or contacts.

The inputs can be integrated individually or simultaneously by SNVT network variables.

Suitable for decentralized mounting on DIN TH35 rail according to IEC 60715 in electrical distribution cabinets.

Data sheet

LF-DI230

LON module with digital inputs

Technical data

Approvals

C-UL Certification	Open Energy Management Equipment 34TZ
--------------------	---------------------------------------

LON interface

Transceiver	TP/FT-10 free topology
Neuron	FT5000
Data format	Standard network variables (SNVT)
Transmission rate	78 kBit/s
Max. length	
Line topology	2700 m / 64 nodes
Free topology	500 m / 64 nodes
Cabling	Twisted Pair

Supply

Operating voltage range	20 to 28 V AC/DC (SELV)
Current consumption	63 mA (AC) / 24 mA (DC)
Relative duty cycle	100 %
Recovery time	550 ms

Inputs

Digital inputs	4
Voltage input	230 V AC

Housing

Dimensions WxHxD	1.378 x 2.728 x 2.362 in. (35 x 69.3 x 60 mm)
Weight	72 g
Mounting position	any
Mounting	on TH35 rail per IEC 60715
Side-by-side mounting	Without space The maximum quantity of LON modules connected side-by-side is limited to 15 or to a maximum power consumption of 2 Amps (AC or DC) per connection to the power supply. For any similar block of additional modules a separate connection to the power supply is necessary.

Material

Housing	polyamide 6.6 V0
Terminal blocks	polyamide 6.6 V0
Cover plate	polycarbonate

Type of protection (IEC 60529)

Housing	IP40
Terminal blocks	IP20

Data sheet

LF-DI230

LON module with digital inputs

Technical data

Terminal blocks	
Supply and bus	
Terminal block	4-pole
Solid wire	max. AWG 16 (1.5 mm ²)
Stranded wire	max. AWG 18 (1.0 mm ²)
Wire diameter	0.3 mm to max. 1.4 mm
Module connection, digital inputs	
Solid wire	max. AWG 12 (4 mm ²)
Stranded wire	max. AWG 14 (2.5 mm ²)
Wire diameter	0.3 mm to max. 2.7 mm
Protective circuitry	Polarity reversal protection of operating voltage Polarity reversal protection of supply and bus
Temperature range	
Operation	23 °F to 131 °F (-5 °C to +55 °C)
Storage	-4 °F to +158 °F (-20 °C to +70 °C)
Display	
Operation	green LED
Status (Service)	yellow LED
State of inputs	yellow LEDs
Additional documents	
Software description, mounting note, certificates	All additional documents are available for download at www.metz-connect.com



Data sheet

LF-DI230

LON module with digital inputs

Page 4/4

Part number

11086313

2015-03-20

Dimensional drawing

